


- 1. ACTUAL LOCATION DETERMINED IN FIELD.
- THE CONCRETE WASHOUT FACILITY SHALL BE MAINTAINED WHEN THE LIQUID AND/OR SOLID REACHES 75% OF THE STRUCTURES CAPACITY.
- 3. CONCRETE WASHOUT FACILITY SHALL BE CLEARLY MARKED WITH SIGN INSTALLED WITHIN 30 FEET OF THE CONCRETE WASHOUT FACILITY.

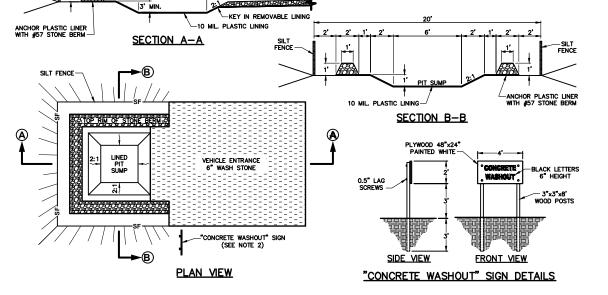

25' MINIMUM

VEHICLE ENTRANCE

© 2% SLOPE

PIT SUMP

NOT TO SCALE



SILT

## **CONCRETE WASHOUT PIT**

SEPTEMBER 2022